

YU-TP21 AMERICAS

BEST VALUE IN THE WORLD OF CUTTING TOOLS



FOR TITANIUM, STAINLESS STEELS AND ALLOY STEELS :

TOUGH MATERIALS
TAKE IT ON WITH TITANOX

TitaNox Power

INDUSTRY-LEADING SOLID CARBIDE END MILLS

**HIGH-PERFORMANCE
MACHINING MADE EASY:**

- Variable Helix and Pitch
- 4 Flute and 5 Flute
- Square End, Chamfer and Radius
- Standard and Extended Lengths
- Inch and Metric Sizes
- 5 Flute Heavy Cutting Solution
TitaNox Power HPC NEW

Take It On With

TitaNox Power

HIGH-PERFORMANCE MACHINING MADE EASY.

- Titanium
- Stainless Steels
- Alloy Steels



4 Flute **5 Flute** **TitaNox-Power HPC
5 Flute**



If you've been looking for a superior carbide end mill that won't back down when the going gets tough, it's time you look at TitaNox.

The TitaNox line is built to take on titanium, stainless steels, alloy steels, and more. With a choice of 4- and 5 flute designs and extra-rigid high-speed performance, TitaNox makes the perfect match for aerospace, power generation and medical applications.

TitaNox — Nothing Cuts Better.

With more choices in high-performance carbide end mills, YG-1 is the undisputed leader in end mill offerings. And with the TitaNox line, you have a full selection of extremely durable end mills built to take on the toughest materials in the business. From titanium to stainless steel and more—TitaNox rules. In either 4 flute or 5 flute configurations you get:

- ▶ YG-1 advanced coating for better wear resistance
- ▶ Better thermal stability
- ▶ Optimized edge design provides excellent performance in heavy cutting applications
- ▶ Excellent performance in difficult-to-machine materials
- ▶ Perfect solution for aerospace, power generation and medical applications
- ▶ Premium grade substrate for longer tool life

TitaNox Power 4 FLUTE DOUBLE CORE END MILLS



Let the Chips Fly.

For heavy cutting in slotting and profiling applications, our true double-core design provides faster chip evacuation and improved dimensional stability. Experience what a difference double-core design can make in your operation.

- ▶ Highly rigid double core adds stability and improves rigidity
- ▶ Unique 4 flute design provides excellent chip evacuation
- ▶ Variable flute design featuring multiple helix helps increase performance, reduce vibration and eliminate chatter

CASE STUDY

4 Flute Double Core End Mills vs. Competitors

Cutting Conditions	
Milling Method	Slotting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12(R1) x Ø12 x 26 x 80
RPM	1591 rev./min.
IPM	10 in./min.
Axial Depth	.470"
Coolant	Wet Cut
Overhang	1.41"
Machine	Machining Center



YG TitaNox-POWER Total Milling Length : 57 ft.



Competitor A Total Milling Length : 53 ft.



Competitor B Total Milling Length : 53 ft.



5 Flute Multiple Helix End Mills vs. Competitors


Cutting Conditions	
Milling Method	Down & Side Cutting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12 x Ø12 x 26 x 83
RPM	1591 rev./min.
IPM	15.669 in./min.
Axial Depth	.710"
Radial Depth	.141"
Coolant	Wet Cut
Machine	Machining Center




YG TitaNox-POWER Total Milling Length : 52 ft.



Competitor A Total Milling Length : 52 ft.




Competitor B Total Milling Length : 52 ft.



5 Flute TitaNox Power HPC vs. Competitor

Cutting Conditions	
Milling Method	Side Cutting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	3/4(R.03")x3/4x1-1/2x4"
RPM	2000 rev./min.
IPM	30 in./min.
Milling Method	Axial : .075" / Radial : 1.5"
Coolant	Wet Cut
Machine	Machining Center

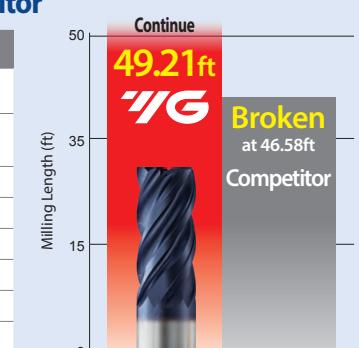

YG TitaNox-POWER Milling Length = 49.21ft




Competitor A Broken at 46.58ft




How Our 4-Flute Double-Core Design Can Cut It Where Others Can't.

Whether in profiling or slotting conditions, the TitaNox double-core design takes end milling titanium and other tough metals to a new level. With our super-rigid, heat resistant design featuring an innovative large gullet configuration, the TitaNox can cut it where single-core designs can't. With outstanding chip evacuation and the added ability to maneuver in tough materials, the TitaNox double-core end mills can combine heavy profiling and slotting in the same move—without vibration or chip packing.

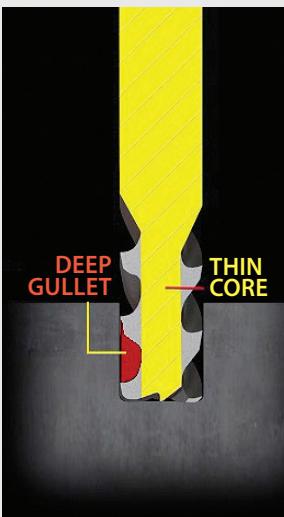


▲ Thin-core designs allow aggressive cutting at first, but are soon slowed down due to excessive vibration, and often break.

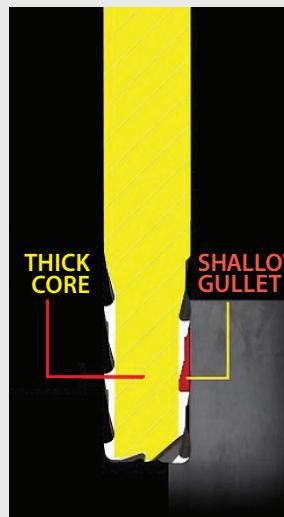


▲ Thick-core designs provide enhanced stability but don't deliver enough chip evacuation, which can often lead to catastrophic failure.




▲ The TitaNox double-core design provides the best of both worlds – excellent chip evacuation combined with tool rigidity—to ensure stability, cut after cut. All this, plus quiet, vibration-free operation.

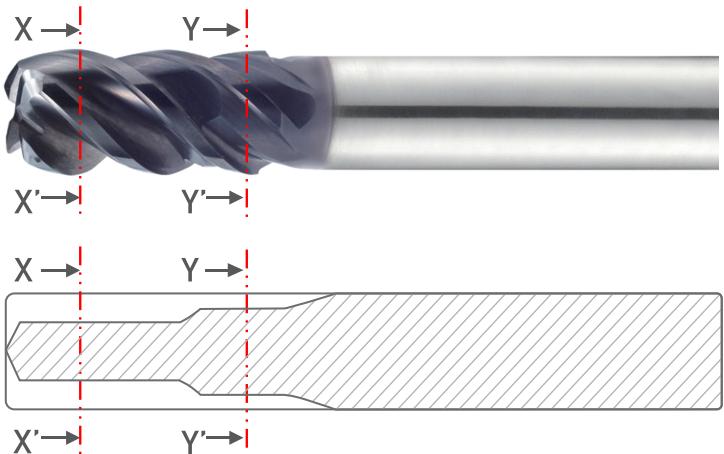

▲ The illustration above detailed along the X-X' axis shows how the 4 flute design starts the cut with aggressive chip evacuation. The Y-Y' axis shows how the double core comes into play, providing perfect slotting operations through its extra-rigid double-core design.



SECTION X-X'
Excellent chip
evacuation




SECTION Y-Y'
Higher rigidity


Super-Stable, Super-Performing, Super-Productive.



▲ For smooth, effortless profiling, the double-core design provides extremely stable cutting for increased productivity. No other end mill performs better in tough cutting conditions.

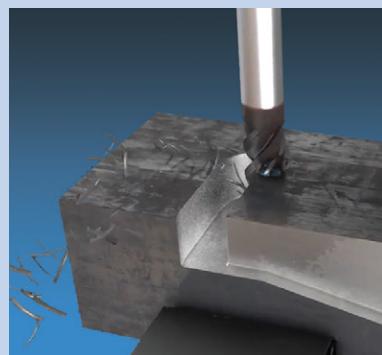

▲ Switch from profiling to slotting without excessive vibration without loading up. TitaNox double-core design pushes productivity higher in tough-to-mill materials.

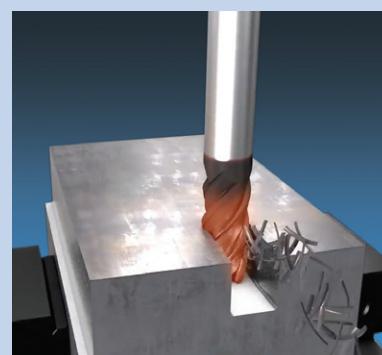

▲ Other 4 flute single-core tools can load up in heavy axial depths of cut and break, as shown in the illustration above.



▲ The TitaNox super-rigid design and large gullet configuration provide excellent chip evacuation in titanium.

Our Advanced Coating cuts faster—and lasts longer.

Compared to other competitive coatings currently on the market, YG-1's new advanced coating brings you the best of both worlds—increased tool hardness and higher speed performance. It all adds up to increased productivity in tough materials, and longer tool life. But what really sets our advanced coating apart is how it makes the TitaNox line the best value around in cutting tools — just another way YG-1 adds more value for less.

Customized End Mills!

Now the best value in the world of cutting tools goes one better with the **YG-1 QuickTurn Special End Mill Program**.


Get customized solid carbide end mills for your specific application plus, quick response specials – LOC, radius and LBS, all with YG-1's advanced technology and the high-performance cutting-edge features of **V7 PLUS A** and **TitaNox-Power** end mills.

And since your order goes to our state-of-the art Tech Center in Charlotte, NC right here in the USA, it goes into production the same day.

We're known for bringing you the widest standard end mill offering in the industry.


With our new QuickTurn program, the possibilities are almost unlimited!

V7 PLUS A

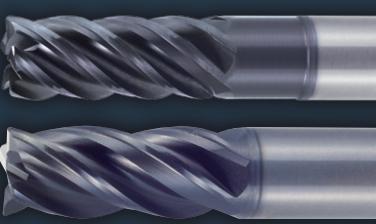

TitaNox-Power



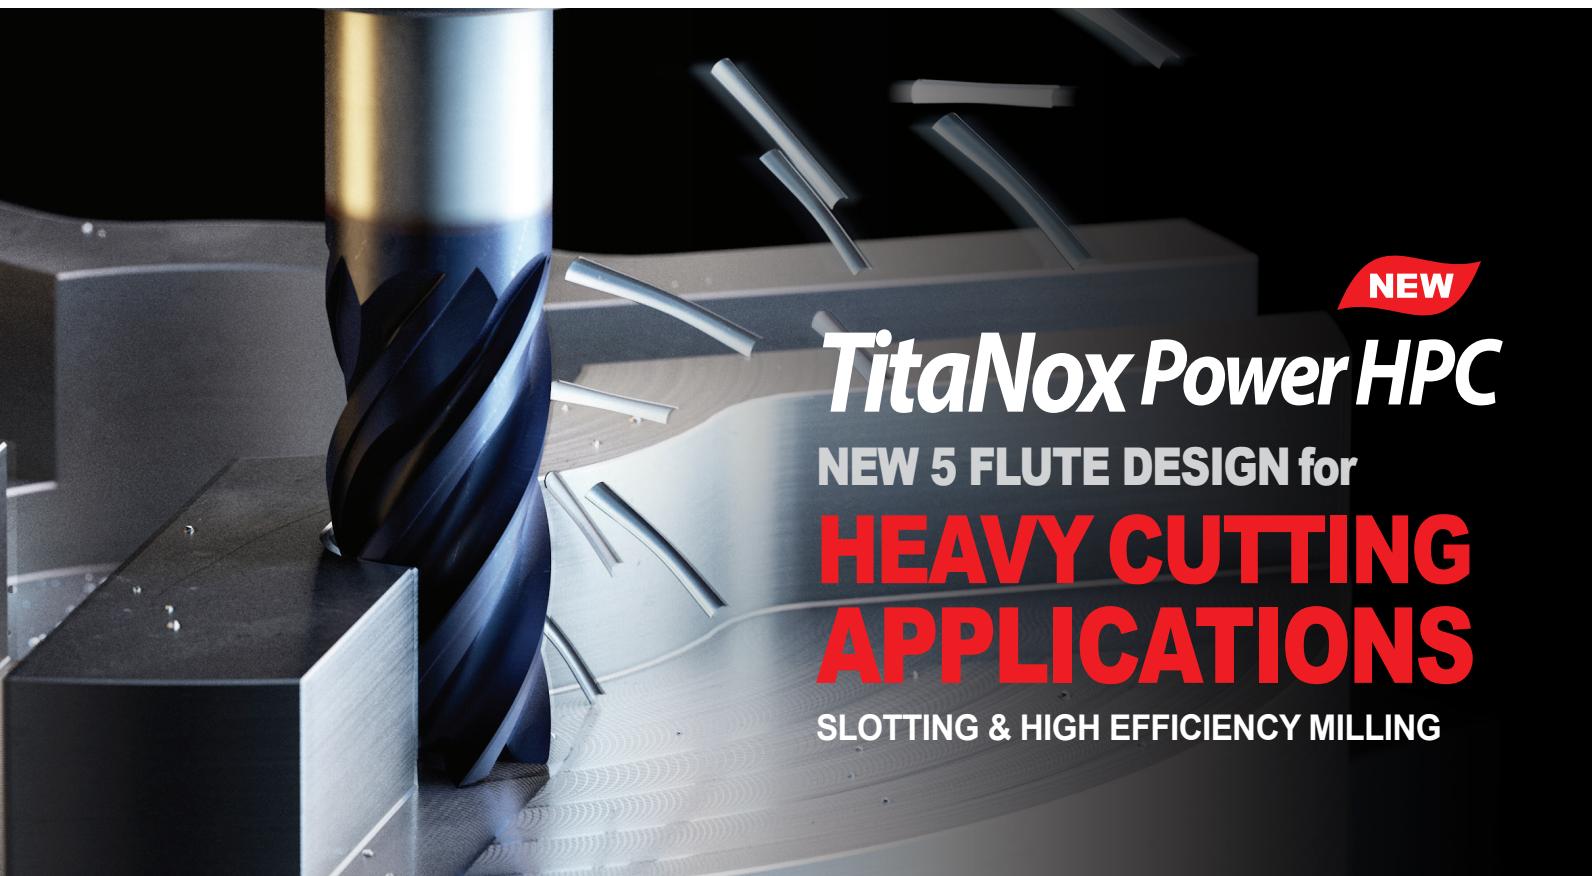

Features

- New design enhances chip space in heavy cuts, while still maintaining rigidity in peel milling.
- Full eccentric relief for edge strength.
- YG-1 advanced coating for better wear resistance
- Unequal index design for Chatter-Free cutting




Unequal Index

Exclusively Designed Unique Geometry applied to Reduce Vibration and also to achieve Excellent surface finish


Core Design

YG-1's High Performance Core Geometries is designed for superior chip evacuation. It's excellent at Slotting & Heavy Profiling.


Applications




Side Cutting




Slitting

Trochoidal Milling
And Peel Milling

Circular Interpolation



HSM




Finishing

Work Materials



Recommended for high performance milling of Stainless Steel, Titanium, and Heat-Resistant Super Alloys

CASE STUDY

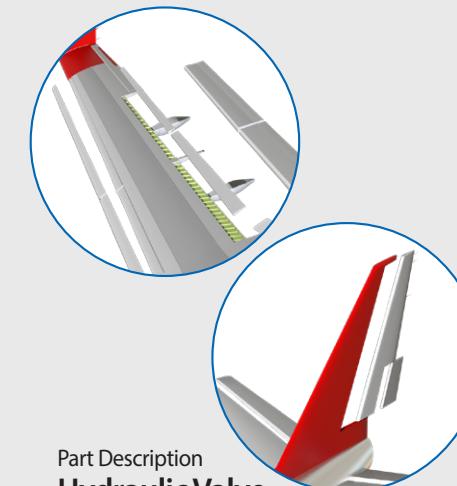


Part Description
Hydraulic Valve

Size(inch)	1/2(R.03") x 1/2 x 1-1/4 x 3-1/2
Work Material	15-5PH (HRC 34-42 / HB 320-400)
Tool Holder	Shrink fit
SFM	420 ft/min.
IPM	80 inch/min.
RPM	3,200 rev./min.
Milling Method	Trochoidal Cutting
Ap	1.000"
Ae	.025"
Coolant	Water-Based
Machine	Machining Center



7 Parts
Competitor A

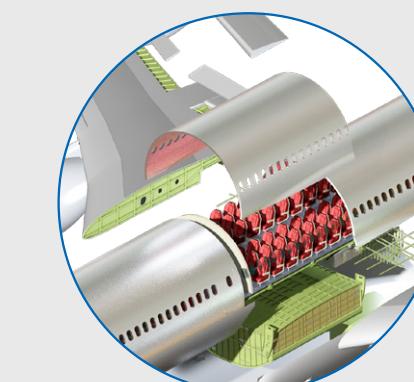

Part Description
Aerospace Structure part

Size(inch)	5/8(R.12") x 5/8 x 1-1/2(2") x 4"
Work Material	Ti6Al4V (HRC 36 / HB 336)
Tool Holder	Shrink Fit
SFM	275-375 ft/min.
IPM	20-45 inch/min.
RPM	1680-2292 rev./min.
Milling Method	Helical Ramping, Pocket, Ramping, Profile and Slotting
Ap	.300" - 1.500"
Ae	.050" - .625"
Ramping	1°- 1-1/2°
Helical Interpolation	0.5°
Coolant	Water-Based
Machine	Machining Center



3-4 Hours
Competitor B

GUIDE TO ICONS


The tool is made of micrograin carbide



Helix Angle



Tool Ends:

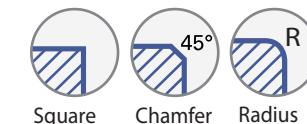

Tool Ends:



No. of Flutes



Type of Shank



Plain shank Weldon flat

Cutting Conditions





SELECTION GUIDE

Inch			
Series	UGMG42	UGMG43	UGMH12
Shank	Plain	Weldon Flat	Plain
Flute	4		5
Helix Angle	43° / 45° (Multiple Helix)		43°/44°/45° (Multiple Helix)
Cutting Edge Shape	Corner Radius	Corner Radius	Square
Size Min	1/4	3/8	1/8
Size Max	1	1	1-1/4
Page	10	11	12-14

SOLID CARBIDE

TitaNox-POWER

END MILLS

A QR code located in the bottom right corner of the page, which links to the website globalyg1.com/mat for material search.

High Speed Machining for Exotic Materials: Titanium, Inconel and Stainless Steels

Recommended cutting conditions : p.20

◎: Excellent ○: Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Mechanical Properties		Surface Treatment	Notes
			Material Type	Condition			Yield Strength (MPa)	Tensile Strength (MPa)	Impact Energy (J)	
P	1	Non-alloy steel	About 0.15% C	Annealed	125		○	○		○
	2		About 0.45% C	Annealed	190	13	○	○		○
	3		About 0.45% C	Quenched & Tempered	250	25	○	○		○
	4		About 0.75% C	Annealed	270	28	○	○		○
	5		About 0.75% C	Quenched & Tempered	300	32	○	○		○
	6	Low alloy steel		Annealed	180	10	○	○		○
	7			Quenched & Tempered	275	29	○	○		○
	8			Quenched & Tempered	300	32	○	○		○
	9			Quenched & Tempered	350	38	○	○		○
	10	High alloyed steel, and tool steel		Annealed	200	15	○	○		○
	11			Quenched & Tempered	325	35	○	○		○
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎		◎
	13		Martensitic	Quenched & Tempered	240	23	◎	◎		◎
	14		Austenitic		180	10	◎	◎		◎
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○	○		○
	16		Pearlitic (Martensitic)		260	26	○	○		○
	17	Nodular cast iron	Ferritic		160	3	○	○		○
	18		Pearlitic		250	25	○	○		○
	19	Malleable cast iron	Ferritic		130		○	○		○
	20		Pearlitic		230	21	○	○		○
N	21	Aluminum-wrought alloy	Not Curable		60					
	22		Curable	Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75					
	24		≤ 12% Si, Curable	Hardened	90					
	25		> 12% Si, Not Curable		130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110					
	27		CuZn, CuSnZn (Brass)		90					
	28		CuSn, lead-free copper and electrolytic copper		100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○		○
	32			Cured	280	30	○	○		○
	33			Annealed	250	25	○	○		○
	34		Ni or Co Based	Cured	350	38	○	○		○
	35			Cast	320	34	○	○		○
	36	Titanium Alloys	Pure Titanium		400 Rm		◎	◎		◎
	37		Alpha + Beta Alloys	Hardened	1050 Rm		◎	◎		◎
H	38	Hardened steel		Hardened	550	55				
	39			Hardened	630	60				
	40	Chilled Cast Iron		Cast	400	42				
	41	Hardened Cast Iron		Hardened	550	55				

HIGH PERFORMANCE SOLID CARBIDE END MILLS


4-FLUTE DOUBLE CORE STANDARD LENGTH (PLAIN SHANK)

SERIES

Corner Radius UGMG42

► Double core end mill has a unique flute design for excellent chip evacuation and higher rigidity.

► The double core adds stability and aids chip flow, reducing tool deflection, improving dimensional stability and workpiece accuracy.

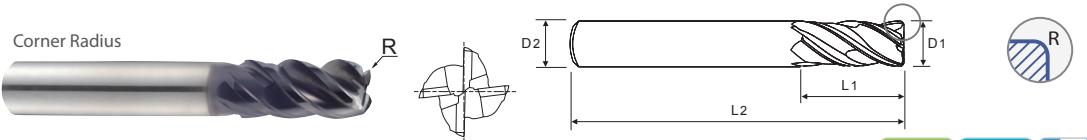

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Corner Radius							
				.010	.015	.030	.060	.090	.125	.190	.250
				EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
1/4	1/4	9/16	2-1/2	UGMG42802	UGMG42016	UGMG42901	UGMG42902				
		3/4	2-1/2			UGMG42924	UGMG42925				
		1	3			UGMG42S926*	UGMG42S927*				
3/8	3/8	1/2	2-1/2			UGMG42K998	UGMG42K999	UGMG42K801			
		7/8	2-1/2			UGMG42928	UGMG42929	UGMG42930			
		13/16	2-1/2	UGMG42931		UGMG42905	UGMG42906	UGMG42907			
		1	3	UGMG42932	UGMG42803	UGMG42933	UGMG42934	UGMG42935			
		1-1/4	3	UGMG42S936*	UGMG42S804*	UGMG42S937*	UGMG42S938*	UGMG42S939*			
1/2	1/2	1	3	UGMG42940		UGMG42908	UGMG42909	UGMG42910	UGMG42911		
		1-1/4	3	UGMG42810	UGMG42811	UGMG42813	UGMG42815	UGMG42816	UGMG42817		
		1-1/4	3-1/2		UGMG42805	UGMG42912	UGMG42941	UGMG42942	UGMG42943		
		1-5/8	4			UGMG42S944*	UGMG42S945*	UGMG42S946*	UGMG42S947*		
		2	4			UGMG42S806*	UGMG42S807*	UGMG42S808*	UGMG42S809*		
5/8	5/8	1-1/4	3-1/2			UGMG42040	UGMG42913	UGMG42914	UGMG42915		
		1-5/8	4			UGMG42948	UGMG42949	UGMG42950	UGMG42951		
		2	4			UGMG42S952*	UGMG42S953*	UGMG42S954*	UGMG42S955*		
		3-1/4	6			UGMG42S956*	UGMG42S957*	UGMG42S958*	UGMG42S959*		
3/4	3/4	1-1/2	4			UGMG42048	UGMG42916	UGMG42917	UGMG42918	UGMG42919	UGMG42960
		1-7/8	4			UGMG42961	UGMG42962	UGMG42963	UGMG42964	UGMG42965	UGMG42966
		2-1/4	5			UGMG42967	UGMG42968	UGMG42969	UGMG42970	UGMG42971	UGMG42972
		3-1/4	6			UGMG42S973*	UGMG42S974*	UGMG42S975*	UGMG42S976*	UGMG42S977*	UGMG42S978*
1	1	2	5			UGMG42064	UGMG42920	UGMG42921	UGMG42922	UGMG42923	UGMG42979
		2-5/8	5			UGMG42980	UGMG42981	UGMG42982	UGMG42983	UGMG42984	UGMG42985
		3	6			UGMG42986	UGMG42987	UGMG42988	UGMG42989	UGMG42990	UGMG42991
		4-1/4	7			UGMG42S992*	UGMG42S993*	UGMG42S994*	UGMG42S995*	UGMG42S996*	UGMG42S997*

Mill Dia.Tolerance (in)

Shank Dia.Tolerance

* Length of cut in excess of 3xD on 45° single-helix requires feed reduction of approximately 50%

0 ~ .0012

h5 * Shank Dia.≥01/2 : h6

◎ : Excellent ○ : Good

ISO	P								M								K										
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRC	13	25	28	32	36	10	29	38	15	35	10	26	3	25	21												
HB	125	190	250	270	300	180	275	300	200	325	200	240	180	180	260	160	250	130	230								
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○							
ISO	N								S								H										
Material Description	Aluminum-wrought alloy				Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
HRC											15	30	25	38	34	35	36	37	38	39	40	41					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550						
Recommend											○	○	○	○	○	○	○	○	○	○	○						

HIGH PERFORMANCE SOLID CARBIDE END MILLS


4-FLUTE STANDARD LENGTH (WELDON FLAT SHANK)

SERIES

Corner Radius UGMG43

► Double core end mill has a unique flute design for excellent chip evacuation and higher rigidity.

► The double core adds stability and aids chip flow, reducing tool deflection, improving dimensional stability and workpiece accuracy.

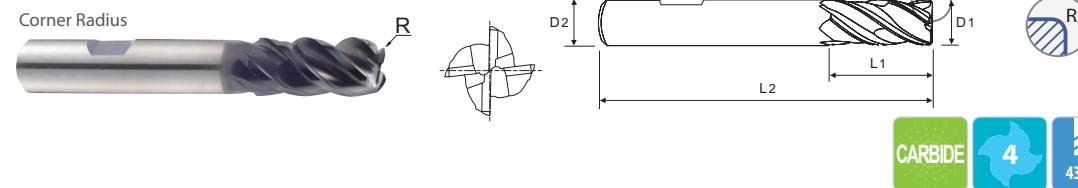

Unit : INCH

HIGH PERFORMANCE SOLID CARBIDE END MILLS **5-FLUTE STANDARD LENGTH (PLAIN SHANK)**

Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.

Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

Special roughing profile for machining Titanium and Titanium Alloys.

Longer tool life with special coating.

Square

Chamfer

Corner Radius

Reinforced cutting edge

SQUARE END

CHAMFER

CARBIDE

5

43°/44°/45°

PLAIN

C x 45°

Y Coating

p.22

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square	Chamfer	Corner Radius				
						.015	.030	.060	.090	.125
				EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
1/8	1/8	1/4	1-1/2	UGMH12008	UGMG32008	UGMG34008	UGMG34950			
		3/8	1-1/2	UGMH12901	UGMG32901	UGMG34901	UGMG34951			
		1/2	2-1/2	UGMH12S902*		UGMG34S952*	UGMG34S953*			
		3/4	2-1/2	UGMH12S903*		UGMG34S954*	UGMG34S955*			
3/16	3/16	5/16	2	UGMH12012	UGMG32012	UGMG34012	UGMG34956			
		9/16	2	UGMH12904	UGMG32902	UGMG34902	UGMG34957			
		3/4	2-1/2	UGMH12S905*		UGMG34S958*	UGMG34S959*			
1/4	1/4	3/8	2	UGMH12016	UGMG32016	UGMG34960	UGMG34016	UGMG34961		
		1/2	2-1/2	UGMH12906		UGMG34962	UGMG34963	UGMG34964		
		3/4	2-1/2	UGMH12907	UGMG32903	UGMG34903	UGMG34904	UGMG34905		
		1	3	UGMH12S908*		UGMG34S965*	UGMG34S966*	UGMG34S967*		
		1-1/4	3	UGMH12S909*		UGMG34S968*	UGMG34S969*	UGMG34S970*		
5/16	5/16	7/16	2"	UGMH12020	UGMG32020	UGMG34971	UGMG34020	UGMG34972		
		13/16	2-1/2	UGMH12910	UGMG32904	UGMG34906	UGMG34907	UGMG34908		
		1	3	UGMH12S911*		UGMG34S973*	UGMG34S974*	UGMG34S975*		
3/8	3/8	1/2	2-1/2	UGMH12024	UGMG32024	UGMG34976	UGMG34024	UGMG34909	UGMG34977	
		1	3	UGMH12912	UGMG32905	UGMG34910	UGMG34911	UGMG34912	UGMG34978	
		1-1/4	3	UGMH12S913*		UGMG34S979*	UGMG34S980*	UGMG34S981*	UGMG34S982*	
		1-1/2	4	UGMH12S914*		UGMG34S983*	UGMG34S984*	UGMG34S985*	UGMG34S986*	
1/2	1/2	5/8	2-1/2	UGMH12032	UGMG32032	UGMG34032	UGMG34913	UGMG34914	UGMG34987	UGMG34988
		1	3	UGMH12915	UGMG32906	UGMG34915	UGMG34916	UGMG34917	UGMG34918	UGMG34919
		1-1/4	3-1/2	UGMH12916	UGMG32907	UGMG34920	UGMG34921	UGMG34922	UGMG34923	UGMG34924
		1-5/8	4	UGMH12S917*		UGMG34S989*	UGMG34S990*	UGMG34S991*	UGMG34S992*	UGMG34S993*
		2	4	UGMH12S918*		UGMG34S994*	UGMG34S995*	UGMG34S996*	UGMG34S997*	UGMG34S998*

Mill Dia.Tolerance (in)	Shank Dia.Tolerance
0 ~ -.0012	h5 * Shank Dia. $\geq \varnothing 1/2$: h6

* Length of cut in excess of $3 \times D$ on 45° single-helix requires feed reduction of approximately 50%

NEXT PAGE

12

YG YG-1 CO., LTD.

800-765-8665 | yg1usa.com

HIGH PERFORMANCE SOLID CARBIDE END MILLS 5-FILLET STANDARD LENGTH (PLAIN SHANK)

► Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.

► Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

► Special roughing profile for machining Titanium and Titanium Alloys.

► Longer tool life with special coating.

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square	Chamfer	Corner Radius						
						.015	.030	.060	.090	.125	.190	.250
				EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
5/8	5/8	3/4	3	UGMH12040	UGMG32040		UGMG34040	UGMG34925	UGMG34999	UGMG34801		
		1-1/4	3-1/2	UGMH12919	UGMG32908	UGMG34926	UGMG34927	UGMG34928	UGMG34929	UGMG34930		
		1-5/8	4	UGMH12920			UGMG34802	UGMG34803	UGMG34804	UGMG34805		
		2-1/8	4-1/2	UGMH12S921*			UGMG34S806*	UGMG34S807*	UGMG34S808*	UGMG34S809*		
		2-1/2	5	UGMH12S922*			UGMG34S810*	UGMG34S811*	UGMG34S812*	UGMG34S813*		
3/4	3/4	1	3-1/2	UGMH12048	UGMG32048		UGMG34048	UGMG34931	UGMG34932	UGMG34814	UGMG34815	UGMG34816
		1-1/2	4	UGMH12923	UGMG32909	UGMG34933	UGMG34934	UGMG34935	UGMG34936	UGMG34937	UGMG34938	UGMG34817
		1-7/8	5	UGMH12924			UGMG34818	UGMG34819	UGMG34820	UGMG34821	UGMG34822	UGMG34823
		2-1/4	5	UGMH12925			UGMG34824	UGMG34825	UGMG34826	UGMG34827	UGMG34828	UGMG34829
		2-3/4	5	UGMH12S926*			UGMG34S830*	UGMG34S831*	UGMG34S832*	UGMG34S833*	UGMG34S834*	UGMG34S835*
		3-1/4	6	UGMH12S927*			UGMG34S836*	UGMG34S837*	UGMG34S838*	UGMG34S839*	UGMG34S840*	UGMG34S841*
1	1	1-1/8	4	UGMH12064	UGMG32064		UGMG34064	UGMG34939	UGMG34940	UGMG34842	UGMG34843	UGMG34844
		1-1/2	4	UGMH12928	UGMG32910	UGMG34941	UGMG34942	UGMG34943	UGMG34944	UGMG34945	UGMG34946	UGMG34845
		2	5	UGMH12929	UGMG32911		UGMG34947	UGMG34948	UGMG34949	UGMG34846	UGMG34847	UGMG34848
		2-5/8	5	UGMH12930			UGMG34849	UGMG34850	UGMG34851	UGMG34852	UGMG34853	UGMG34854
		3-1/4	6	UGMH12S931*			UGMG34S855*	UGMG34S856*	UGMG34S857*	UGMG34S858*	UGMG34S859*	UGMG34S860*
		4-1/4	7	UGMH12S932*			UGMG34S861*	UGMG34S862*	UGMG34S863*	UGMG34S864*	UGMG34S865*	UGMG34S866*
1-1/4	1-1/4	1-1/2	4-1/2	UGMH12116				UGMG34116	UGMG34867	UGMG34868	UGMG34869	UGMG34870
		2	4-1/2	UGMH12933				UGMG34871	UGMG34872	UGMG34873	UGMG34874	UGMG34875
		2-5/8	5-1/2	UGMH12934				UGMG34876	UGMG34877	UGMG34878	UGMG34879	UGMG34880
		3-1/4	6	UGMH12935				UGMG34881	UGMG34882	UGMG34883	UGMG34884	UGMG34885
		4-1/2	7	UGMH12S936*				UGMG34S886*	UGMG34S887*	UGMG34S888*	UGMG34S889*	UGMG34S890*

*Length of cut in excess of 3 x D on 45° single-helix requires feed reduction of approximately 50%

Mill Dia.Tolerance (in)	Shank Dia.Tolerance
0 ~ -.0012	h5 * Shank Dia > Ø1/2 : h6


800-765-8665 | yg1usa.com

YG YG-1 CO., LTD.

13

HIGH PERFORMANCE SOLID CARBIDE END MILLS 5-FLUTE EXTENDED LENGTH (PLAIN SHANK)

- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

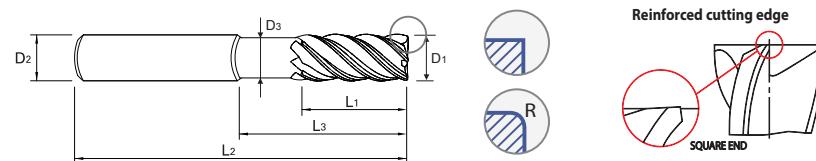

Unit : INCH

OD (D ₁)	SD (D ₂)	LOC (L ₁)	LBS (L ₃)	OAL (L ₂)	Neck Dia (D ₃)	Square	Corner Radius					
							.030	.060	.090	.125	.190	.250
						EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
1/8	1/8	5/32	3/8	3	.113	UGMH06008	UGMH07008					
		5/32	1/2	3	.113	UGMH06901	UGMH07901					
		5/32	5/8	3	.113	UGMH06902	UGMH07902					
3/16	3/16	7/32	1/2	3	.176	UGMH06012	UGMH07012					
		7/32	3/4	3	.176	UGMH06903	UGMH07903					
		7/32	1	3	.176	UGMH06904	UGMH07904					
1/4	1/4	3/8	3/4	4	.230	UGMH06016	UGMH07016	UGMH07905				
		3/8	1-1/8	4	.230	UGMH06905	UGMH07906	UGMH07907				
		3/8	2-1/8	4	.230	UGMH06906	UGMH07908	UGMH07909				
3/8	3/8	1/2	1-1/8	4	.344	UGMH06024	UGMH07024	UGMH07910	UGMH07911			
		1/2	2-1/8	4	.344	UGMH06907	UGMH07912	UGMH07913	UGMH07914			
		1/2	3-1/8	5	.344	UGMH06923	UGMH07804	UGMH07805	UGMH07806			
		1/2	3-1/8	6	.344	UGMH06908	UGMH07915	UGMH07916	UGMH07917			
		1/2	4-1/8	6	.344	UGMH06909	UGMH07918	UGMH07919	UGMH07920			
1/2	1/2	5/8	1-1/2	4	.461	UGMH06032	UGMH07032	UGMH07921	UGMH07922	UGMH07923		
		5/8	2-1/4	4	.461	UGMH06910	UGMH07924	UGMH07925	UGMH07926	UGMH07927		
		5/8	3-3/8	5	.461	UGMH06924	UGMH07807	UGMH07808	UGMH07809	UGMH07810		
		5/8	3-3/8	6	.461	UGMH06911	UGMH07928	UGMH07929	UGMH07930	UGMH07931		
		5/8	4-1/8	6	.461	UGMH06912	UGMH07932	UGMH07933	UGMH07934	UGMH07935		
5/8	5/8	3/4	1-5/8	4	.586	UGMH06040	UGMH07040	UGMH07936	UGMH07937	UGMH07938		
		3/4	2-3/8	6	.586	UGMH06913	UGMH07939	UGMH07940	UGMH07941	UGMH07942		
		3/4	3-3/8	6	.586	UGMH06914	UGMH07943	UGMH07944	UGMH07945	UGMH07946		
		3/4	4-1/8	6	.586	UGMH06915	UGMH07947	UGMH07948	UGMH07949	UGMH07950		

NEXT PAGE ►



Mill Dia.Tolerance (in)	Shank Dia.Tolerance
0 ~ - .0012	h5 * Shank Dia. $\geq \varnothing 1/2$: h6

Feed to be reduced by approximately 50% if L.O.C. (Length Of Cut) is over 3xD

ISO	P										M						K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
Material Description	VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
VDI 3323		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21			
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	15	23	10	26	21	
Recommend		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34	55	60	42	55				
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend											○	○	○	○	○	○	○	○	○	○	○		

HIGH PERFORMANCE SOLID CARBIDE END MILLS 5-FLUTE EXTENDED LENGTH (PLAIN SHANK)


- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

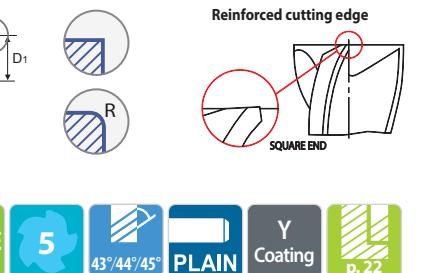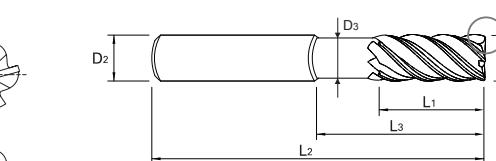

HIGH PERFORMANCE SOLID CARBIDE END MILLS

4-FLUTE DOUBLE CORE EXTENDED LENGTH PLAIN SHANK)

► Double core end mill has a unique flute design for excellent chip evacuation and higher rigidity.
► The double core adds stability and aids chip flow, reducing tool deflection, improving dimensional stability and workpiece accuracy.

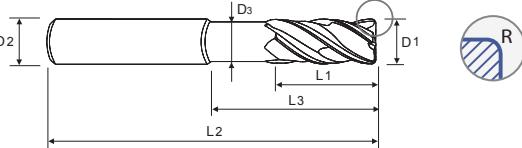

Unit : METRIC

OD (D ₁)	SD (D ₂)	LOC (L ₁)	LBS (L ₃)	OAL (L ₂)	Neck Dia (D ₃)	Corner Radius							
						0.50	1.00	1.50	2.00	3.00	3.50	4.00	
Metric	Inch					EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	
6	.2362	6	13	20	57	5.5	GMG40060	GMG40901					
8	.315	8	19	25	63	7.5	GMG40080	GMG40902	GMG40903	GMG40904			
10	.3937	10	22	30	72	9.2	GMG40100	GMG40905	GMG40906	GMG40907			
12	.4724	12	26	35	83	11.0	GMG40120	GMG40908	GMG40909	GMG40910	GMG40911		
14	.5512	14	26	35	83	13.0		GMG40140		GMG40912			
16	.6299	16	35	43	92	15.0		GMG40160	GMG40913	GMG40914	GMG40915	GMG40916	
20	.7874	20	44	56	110	19.0		GMG40200	GMG40917	GMG40918	GMG40919	GMG40920	GMG40921
25	.9843	25	55	70	130	24.0		GMG40250	GMG40922	GMG40923	GMG40924		GMG40925

Mill Dia.Tolerance (mm)


Shank Dia.Tolerance

0 ~ -0.03

h5 * Shank Dia.≥Ø12:h6


RECOMMENDED CUTTING CONDITIONS -INCH

UGMG42, UGMG43 SERIES



4 FLUTES DOUBLE CORE - Side cutting

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						1/4	5/16	3/8	1/2	5/8	3/4	1	
P	1-5	Non-alloy steel	0.4D	1.0D (0.7D)*	SFM (Vc)	525	525	525	525	525	525	525	
					IPT (fz)	.0011	.0014	.0017	.0021	.0025	.0030	.0033	
	6-8		0.4D	1.0D (0.7D)*	RPM	8020	6420	5350	4010	3210	2670	2010	
					IPM (FEED)	35	36	36	34	32	32	27	
	9		0.4D	1.0D (0.7D)*	SFM (Vc)	525	525	525	525	525	525	525	
					IPT (fz)	.0011	.0014	.0017	.0021	.0025	.0030	.0033	
	10		0.4D	1.0D (0.7D)*	RPM	8020	6420	5350	4010	3210	2670	2010	
					IPM (FEED)	35	36	36	34	32	32	27	
	11.1		0.4D	1.0D (0.7D)*	SFM (Vc)	490	490	490	490	490	490	490	
					IPT (fz)	.0010	.0014	.0017	.0019	.0025	.0028	.0033	
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.4D	1.0D (0.7D)	RPM	7490	5990	4990	3740	2990	2500	1870	
					IPM (FEED)	33	34	36	31	30	28	25	
	14.1		0.4D	1.0D (0.7D)*	SFM (Vc)	490	490	490	490	490	490	490	
					IPT (fz)	.0010	.0014	.0017	.0019	.0025	.0028	.0033	
	14.2		0.4D	0.6D	RPM	5270	4220	3510	2640	2110	1760	1320	
					IPM (FEED)	21	22	22	20	20	20	17	
	K	15-20	Grey cast iron	0.4D	1.0D (0.7D)*	SFM (Vc)	145	145	145	145	145	145	145
					IPT (fz)	.0006	.0008	.0010	.0013	.0016	.0018	.0021	
S	31-35	Heat Resistant Super Alloys (X12NiCrSi 36-16, 1.4864, Inconel 718, NiCr20TiAl, 24631, NiCu30Al, 24375, G-X120Mn12, 1.3401)	0.3D	0.6D	RPM	1600	1280	1070	800	640	530	400	
					IPM (FEED)	5	5	6	5	5	5	4	
	36-37		0.4D	1.0D (0.7D)*	SFM (Vc)	230	230	230	230	230	230	230	
					IPT (fz)	.0013	.0019	.0022	.0026	.0034	.0037	.0045	
					RPM	3510	2810	2340	1760	1410	1170	880	
					IPM (FEED)	18	21	21	18	19	17	16	



NOTES: ▶ Maximum recommended depth shown


- ▶ Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
 - ▶ Feed to be reduced by approximately 50% if L.O.C.(length of cut) is over 3xD
 - ▶ Reduce speed and feed recommendations for materials harder than listed
 - ▶ Recommendations above are based on ideal conditions.
- Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

* (0.7D): UGMG42K998, UGMG42K999, UGMGK801

0.7D cutting depth for slotting and side cutting applications due to short double-core length

RECOMMENDED CUTTING CONDITIONS -INCH

UGMG42, UGMG43 SERIES



4 FLUTES DOUBLE CORE - Slotting

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						1/4	5/16	3/8	1/2	5/8	3/4	1	
P	1-5	Non-alloy steel	1.0D	1.0D (0.7D)*	SFM (Vc)	410	410	410	410	410	410	410	
					IPT (fz)	.0010	.0013	.0017	.0019	.0025	.0028	.0033	
	6-8		1.0D	1.0D (0.7D)*	RPM	6260	5010	4180	3130	2510	2090	1570	
					IPM (FEED)	25	26	28	24	25	23	21	
	9		1.0D	1.0D (0.7D)*	SFM (Vc)	395	395	395	395	395	395	395	
					IPT (fz)	.0010	.0013	.0017	.0019	.0025	.0028	.0030	
	10		1.0D	1.0D (0.7D)*	RPM	6040	4830	4020	3200	2410	2010	1510	
					IPM (FEED)	24	25	27	23	24	23	18	
	11.1		1.0D	1.0D (0.7D)*	SFM (Vc)	410	410	410	410	410	410	410	
					IPT (fz)	.0010	.0013	.0017	.0019	.0025	.0028	.0033	
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	1.0D	1.0D (0.7D)	RPM	6260	5010	4180	3130	2510	2090	1570	
					IPM (FEED)	33	36	37	33	32	31	26	
	14.1		1.0D	1.0D (0.7D)*	SFM (Vc)	280	280	280	280	280	280	280	
					IPT (fz)	.0010	.0013	.0016	.0019	.0024	.0028	.0032	
	14.2		0.5D	1.0D	RPM	4280	3420	2850	2140	1710	1430	1070	
					IPM (FEED)	17	18	18	16	16	14	14	
	K	15-20	Grey cast iron	1.0D	1.0D (0.7D)*	SFM (Vc)	120	120	120	120	120	120	120
					IPT (fz)	.0006	.0008	.0010	.0013	.0016	.0		


RECOMMENDED CUTTING CONDITIONS -INCH

UGMH12, UGMG32, UE5G32 UGMG34, UGMH06, UGMH07 SERIES

5 FLUTES - Side cutting


RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)												
						1/8	3/16	1/4	5/16	3/8	1/2	9/16	5/8	11/16	3/4	1	1 1/4	
P	1-5	Non-alloy steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470	
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
	6-8		0.3D	1.5D	RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440	
					IPM (FEED)	29	33	47	43	48	45	43	43	42	36	33	33	
	9		0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	330	330	330	
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
	10		0.3D	1.5D	RPM	10080	6720	5040	4030	3360	2520	2240	2020	1830	1680	1260	1010	
					IPM (FEED)	20	24	33	30	34	32	30	30	29	25	23	23	
	11.1		0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470	
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.3D	1.5D	RPM	11760	7840	5880	4710	3920	2940	2610	2350	2140	1960	1470	1180	
					IPM (FEED)	18	16	26	24	24	26	26	25	24	21	19	19	
M	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17-12-2)	0.3D	1.5D	SFM (Vc)	270	270	270	270	270	270	270	270	270	270	270	270	
					IPT (fz)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041	
	14.2		0.3D	1.5D	RPM	8250	5500	4130	3300	2750	2060	1830	1650	1500	1380	1030	830	17
K	15-20	Grey cast iron	0.3D	1.5D	IPM (FEED)	195	195	195	195	195	195	195	195	195	195	195	195	
					SFM (Vc)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041	
S	31-35	Heat Resistant Super Alloys (X12NiCrSi 36-16, 14864, Inconel 718, NiCr20TiAl, 24631, NiCr30Al, 24375, G-X120Mn12, 13401)	0.1D	1.5D	RPM	3060	2040	1530	1220	1020	760	680	610	560	510	380	310	
					IPM (FEED)	5	4	5	4	4	5	5	5	4	4	4	3	
	36-37		0.2D	1.5D	SFM (Vc)	225	225	225	225	225	225	225	225	225	225	225	225	
					IPT (fz)	.0004	.0004	.0011	.0011	.0013	.0022	.0023	.0024	.0025	.0027	.0031	.0036	
					RPM	6880	4580	3440	2750	2290	1720	1530	1380	1250	1150	860	690	
					IPM (FEED)	14	9	19	15	15	19	18	17	16	16	13	12	



NOTES: ▶ Maximum recommended depth shown

▶ Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less

▶ Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3xD

▶ Reduce speed and feed recommendations for materials harder than listed

▶ Recommendations above are based on ideal conditions

Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

RECOMMENDED CUTTING CONDITIONS -INCH


EMI42, EMI43 SERIES


RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth


5 FLUTES (TitaNox Power HPC) - Heavy Side cutting

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3/16	1/4	5/16	3/8	1/2	5/8	3/4	1	
P	1-5	Low alloy steel	0.5D	1.5D	SFM (Vc)	500	500	500	500	500	500	500	500	
					IPT (fz)	.0013	.0016	.0018	.0022	.0031	.0037	.0043	.0049	
	6-8		0.5D	1.5D	RPM	10190	7640	6110	5090	3820	3060	2550	1910	
					IPM (FEED)	66	61	55	56	59	57	55	47	
	9		0.5D	1.5D	SFM (Vc)	400	400	400	400	400	400	400	400	
					IPT (fz)	.0008	.0012	.0014	.0017	.0024	.0028	.0033	.0038	
	10		0.5D	1.5D	RPM	8150	6110	4890	4070	3060	2440	2040	1530	
					IPM (FEED)	33	37	34	35	37	34	34	29	
	11.1		0.5D	1.5D	SFM (Vc)	450	450	450	450	450	450	450	450	
					IPT (fz)	.0013	.0016	.0018	.0022	.0031	.0037</td			

RECOMMENDED CUTTING CONDITIONS -INCH


EMI42, EMI43 SERIES
5 FLUTES (TitaNox Power HPC) - Side Cutting (Peel Milling)

RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3/16	1/4	5/16	3/8	1/2	5/8	3/4	1	
P	1-5	Non-alloy steel	0.08D	2.0D	SFM (Vc)	650	650	650	650	650	650	650	650	
					IPT (fz)	.0018	.0022	.0026	.0031	.0043	.0051	.0060	.0068	
	6-8	Low alloy steel	0.08D	2.0D	RPM	13240	9930	7950	6620	4970	3970	3310	2480	
					IPM (FEED)	119	109	103	103	107	101	99	84	
	9		0.08D	2.0D	SFM (Vc)	650	650	650	650	650	650	650	650	
					IPT (fz)	.0011	.0017	.0020	.0024	.0033	.0040	.0046	.0053	
	10	High alloyed steel, and tool steel	0.08D	2.0D	RPM	13240	9930	7950	6620	4970	3970	3310	2480	
					IPM (FEED)	73	84	80	79	82	79	76	66	
	11.1		0.08D	2.0D	SFM (Vc)	580	580	580	580	580	580	580	580	
					IPT (fz)	.0018	.0022	.0026	.0031	.0043	.0051	.0060	.0068	
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.06D	2.0D	RPM	11820	8860	7090	5910	4430	3540	2950	2220	
					IPM (FEED)	106	97	92	92	95	90	89	75	
	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17-12-2)	0.06D	2.0D	SFM (Vc)	550	550	550	550	550	550	550	550	
					IPT (fz)	.0011	.0017	.0020	.0024	.0033	.0040	.0046	.0053	
	14.2	Stainless steel (SUS 630, PH 15-5)	0.06D	2.0D	RPM	11200	8400	6720	5600	4200	3360	2800	2100	
					IPM (FEED)	62	71	67	67	69	67	64	56	
	K	15-20	Grey cast iron	0.07D	2.0D	SFM (Vc)	350	350	350	350	350	350	350	350
					IPT (fz)	.0010	.0015	.0016	.0021	.0029	.0034	.0039	.0045	
S	31-35	Heat Resistant Super Alloys (X12NiCrSi 36-16, 14864, Inconel 718, NiCr20TiAl 24631, NiCu30Al 24375, G-X120Mn12, 13401)	0.04D	2.0D	RPM	2440	1830	1470	1220	920	730	610	460	
					IPM (FEED)	7	9	9	9	9	8	7	6	
	36-37	Titanium Alloys (HB 400 Rm, HB 1050 Rm TiAl6V4, 3.7165)	0.05D	2.0D	SFM (Vc)	300	300	300	300	300	300	300	300	
					IPT (fz)	.0006	.0010	.0012	.0014	.0019	.0021	.0023	.0027	


NOTES:

- Maximum recommended depth shown
 - Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
 - Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3xD
 - Reduce speed and feed recommendations for materials harder than listed
 - Recommendations above are based on ideal conditions.
- Adjust parameters accordingly for smaller taper machining centers or less rigid conditions


RECOMMENDED CUTTING CONDITIONS -INCH

EMI42, EMI43 SERIES
5 FLUTES (TitaNox Power HPC) - Slotting

RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						3/16	1/4	5/16	3/8	1/2	5/8	3/4	1
P	1-5	Non-alloy steel	1.0D	1.0D	SFM (Vc)	275	275	275	275	275	275	275	275
					IPT (fz)	.0010	.0013	.0015	.0018	.0024	.0029	.0034	.0039
	6-8	Low alloy steel	1.0D	1.0D	RPM	5600	4200	3360	2800	2100	1680	1400	1050
					IPM (FEED)	28	27	25	25	24	24	24	20
	9		1.0D	1.0D	SFM (Vc)	275	275	275	275	275	275	275	275
					IPT (fz)	.0006	.0010	.0014	.0019	.0023	.0026	.0030	.0033
	10	High alloyed steel, and tool steel	1.0D	0.75D	RPM	4690	3510	2810	2340	1760	1410	1170	880
					IPM (FEED)	23	23	21	21	20	20	19	16
	11.1		1.0D	0.75D	SFM (Vc)	250	250	250	250	250	250	250	250
					IPT (fz)	.0006	.0010	.0014	.0019	.0023	.0026	.0030	.0033
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	1.0D	0.5D	RPM	4580	3440	2750	2290	1720	1380	1150	860
					IPM (FEED)	14	14	12	14	15	13	13	11
	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17-12-2)	1.0D	0.5D	SFM (Vc)	250	250	250	250	250	250	250	250
					IPT (fz)	.0006	.0010	.0014	.0019	.0021	.0023	.0025	.0029
	14.2	Stainless steel (SUS 630, PH 15-5)	1.0D	0.5D	RPM	4070	3060	2440	2040	1530	1220	1020	760

RECOMMENDED CUTTING CONDITIONS – METRIC

GMG40 SERIES

4 FLUTES DOUBLE CORE - Side Cutting

RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						6.0	8.0	10.0	12.0	14.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.4D	1.0D	SFM (Vc)	525	525	525	525	525	525	525	525
					IPT (fz)	.0011	.0014	.0017	.0021	.0023	.0025	.0030	.0033
	5		0.4D	1.0D	RPM	8490	6370	5090	4240	3640	3180	2550	2040
					IPM (FEED)	37	36	35	36	33	32	31	27
	6-7	Low alloy steel	0.4D	1.0D	SFM (Vc)	525	525	525	525	525	525	525	525
					IPT (fz)	.0011	.0014	.0017	.0021	.0025	.0028	.0033	.0033
	8-9		0.4D	1.0D	RPM	8490	6370	5090	4240	3640	3180	2550	2040
					IPM (FEED)	37	36	35	36	33	32	31	27
	10-11.1	High alloyed steel, and tool steel	0.4D	1.0D	SFM (Vc)	490	490	490	490	490	490	490	490
					IPT (fz)	.0010	.0014	.0017	.0019	.0022	.0025	.0028	.0033
	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.4D	1.0D	RPM	7920	5940	4750	3960	3400	2970	2380	1900
					IPM (FEED)	32	33	32	30	30	30	27	25
M	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17 12 2)	0.4D	1.0D	SFM (Vc)	345	345	345	345	345	345	345	345
					IPT (fz)	.0010	.0013	.0016	.0019	.0022	.0024	.0028	.0032
	14.2	Stainless steel (SUS 630, PH 15-5)	0.4D	0.6D	RPM	5580	4180	3350	2790	2390	2090	1670	1340
K	15-20	Grey cast iron	0.4D	1.0D	IPM (FEED)	22	22	21	21	21	20	19	17
					SFM (Vc)	145	145	145	145	145	145	145	145
S	31-35	Heat Resistant Super Alloys (X12NiCrSi 36-16, 1.4864, Inconel 718, NiCr20TiAl, 24631, NiCr30Al, 24375, G-X120Mn12, 1.3401)	0.3D	0.6D	IPT (fz)	.0008	.0010	.0013	.0015	.0017	.0021	.0024	.0026
					RPM	1700	1270	1020	850	730	640	510	410
	36-37	Titanium Alloys (HB 400 Rm, HB 1050 Rm TiAl6V4, 3.7165)	0.3D	0.6D	IPM (FEED)	5	5	5	5	5	4	4	4
					SFM (Vc)	230	230	230	230	230	230	230	230
					IPT (fz)	.0013	.0019	.0022	.0026	.0030	.0034	.0037	.0041
					RPM	3720	2790	2230	1860	1590	1390	1120	890
					IPM (FEED)	19	21	20	19	19	17	16	11




NOTES: ► Maximum recommended depth shown

- Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
 - Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3xD
 - Reduce speed and feed recommendations for materials harder than listed
 - Recommendations above are based on ideal conditions.
- Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

RECOMMENDED CUTTING CONDITIONS – METRIC

GMG40 SERIES

4 FLUTES DOUBLE CORE - Slotting

RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						6.0	8.0	10.0	12.0	14.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.4D	1.0D	SFM (Vc)	410	410	410	410	410	410	410	410
					IPT (fz)	.0010	.0013	.0017	.0019	.0022	.0025	.0028	.0033
	5		0.4D	1.0D	RPM	6630	4970	3980	3310	2840	2490	1990	1590
					IPM (FEED)	27	26	27	25	25	25	22	21
	6-7	Low alloy steel	0.4D	1.0D	SFM (Vc)	395	395	395	395	395	395	395	395
					IPT (fz)	.0010	.0013	.0017	.0019	.0022	.0025	.0028	.0030
	8-9		0.4D	1.0D	RPM	6390	4790	3830	3190	2740	2400	1920	1530
					IPM (FEED)	26	25	26	24	24	24	22	18
	10-11.1	High alloyed steel, and tool steel	0.4D	1.0D	SFM (Vc)	395	395	395	395	395	395	395	395
					IPT (fz)	.0011	.0014	.0017	.0021	.0023	.0025	.0030	.0033
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.4D	1.0D	RPM	410	410	410	410	410	410	410	410
					IPM (FEED)	.0013	.0018	.0022	.0026	.0029	.0032	.0037	.0041
	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17 12 2)	0.4D	1.0D	SFM (Vc)	280	280	280	280	280	280	280	280
K	15-20	Grey cast iron	0.4D	1.0D	IPT (fz)	.0010	.0013	.0016	.0019	.0022	.0024	.0028	.0032

RECOMMENDED CUTTING CONDITIONS - METRIC


GMG24, GMG26, GMG28, GMG30 SERIES

5 FLUTES - Side Cutting



RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0	
P	1-4	Non-alloy steel	0.3D	1.5D	SFM (Vc)	475	475	475	475	475	475	475	475	475	
					IPT (fz)	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	
	5		0.3D	1.5D	RPM	7680	5760	4610	3840	3290	2880	2560	2300	1840	
					IPM (FEED)	50	43	46	48	44	43	42	40	37	
	6-7	Low alloy steel	0.3D	1.5D	SFM (Vc)	475	475	475	475	475	475	475	475	475	
					IPT (fz)	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	
	8-9		0.3D	1.5D	RPM	7680	5760	4610	3840	3290	2880	2560	2300	1840	
					IPM (FEED)	50	43	46	48	44	43	42	40	37	
	10-11.1	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	
					IPT (fz)	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	
					RPM	5340	4000	3200	2670	2290	2000	1780	1600	1280	
					IPM (FEED)	35	30	32	33	31	30	29	28	26	
M	12-13	Stainless steel (SUS 420, X40Cr13-420)	0.3D	1.5D	SFM (Vc)	385	385	385	385	385	385	385	385	385	
					IPT (fz)	.0009	.0010	.0012	.0018	.0020	.0021	.0022	.0024	.0028	
	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17-12)	0.3D	1.5D	RPM	6230	4670	3740	3110	2670	2330	2080	1870	1490	
	14.2	Stainless steel (SUS 630, PH 15-5)	0.3D	1.5D	IPM (FEED)	28	23	22	28	27	24	23	22	21	
K	15-20	Grey cast iron	0.3D	1.5D	SFM (Vc)	270	270	270	270	270	270	270	270	270	
S	31-35	Heat Resistant Super Alloys (X12NiCrSi 36-16, 1.4864, Inconel 718, NiCr20TiAl, 2.4631, NiCr30Al, 2.4375, G-X120Mn12, 1.3401)	0.1D	1.5D	IPT (fz)	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	
					RPM	4370	3270	2620	2180	1870	1640	1460	1310	1050	
	36-37	Titanium Alloys (HB 400 Rm, HB 1050 Rm TiAl6V4, 3.7165)	0.3D	1.5D	IPM (FEED)	19	15	14	20	18	24	22	20	18	



NOTES:

- Maximum recommended depth shown
 - Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
 - Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3xD
 - Reduce speed and feed recommendations for materials harder than listed
 - Recommendations above are based on ideal conditions.
- Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience.

Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA	THAILAND		

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

* For more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea
Phone: +82-32-526-0909
www.yg1.kr / yg1@yg1.kr


YG-1 USA

730 Corporate Woods Parkway
Vernon Hills, IL 60061 U.S.A.
Phone: 800-765-8665 / Technical Assistance: 888-868-5988
www.yg1usa.com

TAKE IT ON WITH



HIGH-PERFORMANCE MACHINING MADE EASY.

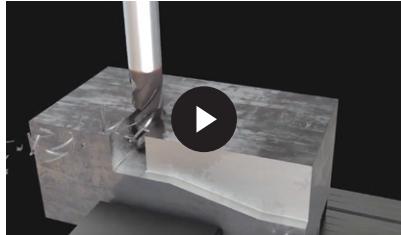

Scan this QR code to see our
TitaNox tools at work.

YG YG-1 CO., LTD.

YG-1 USA

730 Corporate Woods Parkway
Vernon Hills, IL 60061 U.S.A.

Phone: 800-765-8665

Technical Assistance: 888-868-5988

www.yg1usa.com

YG-1 CANADA INC.

3375 North Service Road, Unit A8
Burlington, Ontario, CANADA L7N 3G2

Phone: +1 905-335-2500

FAX: +1 905-335-4003

Customer Service: orders@yg1.ca

www.yg1.ca

YG-1 TOOLS MEXICO SA DE CV

A Carretera Estatal 200 Queretaro-Tequisquiapan KM 19+530 Parque Industrial
Advance Modulo 4 Edif A, Navajas, El Marques, Querétaro, México CP 76260

Phone: +52 442 348 12 70

Customer Service: ventas@yg1mexico.com

www.yg1mexico.com

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonju-gu, Incheon 21984, South Korea

Notice: YG-1 Global head office is relocating from December 2020 to a new address as above;

Phone: +82-32-526-0909

www.yg1.kr

E-mail: yg1@yg1.kr



Search 'YG-1' on social media outlets



YG1YUTP210830003